

# 2D SCAN FX200



## MULTI-PURPOSE FIXED MOUNT 2D BARCODE READER

### KEY FEATURES:




- Megapixel camera supports 1D & 2D barcodes with speed & ease
- IR & light sensors boosts scanning speed & efficiency; automatic light adjustment for low light & mobile screens
- IP54 rating protects against dust, moisture & other contaminants in indoor/outdoor settings
- 1.5m drop resistance, human-centered design
- Ideal for self-service kiosks in e-commerce, express delivery, access control, loyalty programs, mobile payments, event ticketing & more



# 2D SCAN FX200 SPECS

ELECTRICAL	SYMBOLOGIES	-1D: EAN-13, EAN-8, UPC-A, UPE-E, Code 128, Code 39, Codabar, UCC/EAN 128, RSS, ITF, ITF-14, ITF6, Standard 25, Matrix 25, COOP 25, Industrial 25, Plessey, MSI Plessey, Code 11, Code 93, Code 49, Code 16k, etc. -2D: PDF417, QR Code, Data Matrix, Aztec, CSC, Maxicode, Micro QR, Micro PDF 417, GM, Code One, etc.
	IMAGE SENSOR	CMOS 1280*800
	POWER REQUIREMENTS	5VDC +/- 5%
	PROCESSOR	1 GHz, X1500
ENVIRONMENTAL	DROP TEST	1.5m
	HUMIDITY	5% to 95% (Non-Condensing)
	INGRESS PROTECTION RATING	IP54
	TEMPERATURES	-20°C to 60°C (Operating); -40°C to 70°C (Storage)
MECHANICAL	AIMING	650nm Laser Diode or 518nm Green LED
	DIMENSIONS	41.5mm (W) x 49.5mm (D) x 24.3mm (H)
	INTERFACE	RS-232, USB
	SCAN MODES / RATE	Continuous, Level, Pulse & Sense Modes / 60 Frames per Sec.
	WEIGHT	1.98oz (56g)

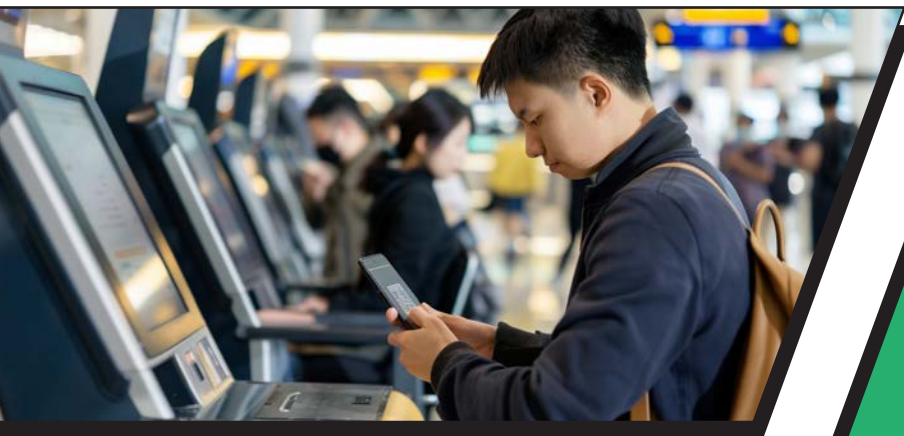

## CORPORATE HEADQUARTERS

10721 WALKER STREET  
 CYPRESS, CA 90630  
 T: (714) 761-6368  
 TF: (800) 984-1010  
 F: (714) 761-8880  
 SALES@IDTECHPRODUCTS.COM

## ASIA

+886-3-326-5988 (TAIWAN)  
 ASIA@IDTECHPRODUCTS.COM

## LATIN AMERICA

(714) 761-6368  
 SALES@IDTECHPRODUCTS.COM

## EUROPE, MIDDLE EAST & AFRICA

EMEA@IDTECHPRODUCTS.COM

ISO 9001 CERTIFIED  
 ISO 14001 CERTIFIED

# IDTECH®

Value through Innovation

IDTECHPRODUCTS.COM

