


VP5300M



SECURE MOTORIZED PAYMENT READER

KEY FEATURES:

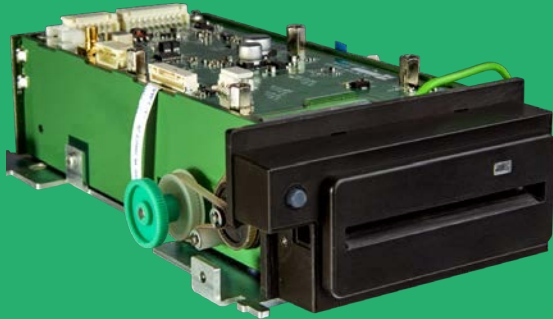

- World's first PCI PTS 5.X SRED certified MSR, EMV contact & EMV contactless payment reader
- Designed as direct drop-in replacement of older non-PCI certified motorized readers
- Common EMV L2 kernel allows for pairing with ID TECH's SmartPIN L80 & L100 pin pads & EMV contactless/NFC antenna module to accept:
 - MSR (ISO & JIS dual head)
 - EMV Chip, Chip-PIN
 - FeliCa
 - EMV contactless
 - MiFare
 - Mobile wallet/loyalty program solutions



VP5300M SPECS

DIMENSIONS	163mm (L) x 65mm (W) x 27.5mm (D)
EMV CONTACT	EMV Contact L1/L2
EMV CONTACTLESS	AMEX, Discover, Interac, JCB, MasterCard & Visa CUP Certifications MiFare: Classic, DESFire, DESFire EV1 & Ultralight C (with Optional VP5300 NFC Antenna)
HUMIDITY	95% Non-Condensing
INTERFACE	Ethernet, RS232, UART & USB HID
MEMORY	32MB Flash Memory / 16MB RAM
MSR	Dual Head MSR (ISO 3-Track & JIS I/II, Read Only & Encrypting), Primary 3-Track MSR (Read Only & Encrypting, Supports ISO 7810, 7811, 7813, AAMVA Hi-Co & Lo-Co), Second JIS I/II MSR (Read Only & Encrypting, Hi-Co & Lo-Co)
OPERATING TEMPERATURE	0°C to 50°C
PIN ENTRY SUPPORT	ID TECH SmartPIN L80 (PCI 6.X) & SmartPIN L100 (PCI 4.X)
POWER	DC 12V - 24V
SAM SLOTS	Optional Externally Mounted SAM Slot Board (8 SAM Slots)
STORAGE TEMPERATURE	-20°C to 70°C



CORPORATE HEADQUARTERS

10721 WALKER STREET
CYPRESS, CA 90630
T: (714) 761-6368
TF: (800) 984-1010
F: (714) 761-8880
SALES@IDTECHPRODUCTS.COM

ASIA

+886-3-326-5988 (TAIWAN)
ASIA@IDTECHPRODUCTS.COM

LATIN AMERICA

(714) 761-6368
SALES@IDTECHPRODUCTS.COM

EUROPE, MIDDLE EAST & AFRICA

EMEA@IDTECHPRODUCTS.COM

ISO 9001 CERTIFIED
ISO 14001 CERTIFIED

IDTECH®

Value through Innovation

IDTECHPRODUCTS.COM

